


## Redukcja nypłowa, gwint cylindryczny, mosiądz

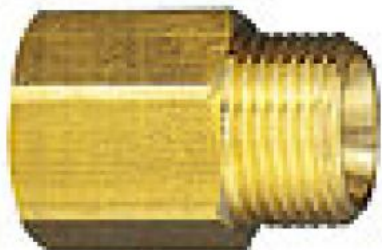

Nazwa	Gwint zew.	Gwint wew.	L1 (mm)	L2 (mm)	SW
252.08	G1/8	G1/4	26	10	17
252.08/1	M5	M5	15	5	8
252.08/2	M5	G1/8	17	5	14
252.08/3	G1/8	M5	17	7	14
252.09	G1/4	G3/8	26	10	19
252.10	G3/8	G1/2	27,0	12	24
252.11	G1/8	G1/8	23	8	14
252.12	G1/4	G1/8	28	10	17
252.13	G1/4	G1/4	28	10	17
252.14	G3/8	G1/4	29	10	19
252.15	G3/8	G3/8	29	10	19
252.16	G1/2	G3/8	34,0	12	24
252.17	G1/2	G1/2	34,0	12	24
252.18	G1/2	G3/4	38,0	13	32
252.19	G3/4	G1	26	11	36